



355-940 - JFK Rings Accessory Package

Sales & Service

Spieth Anderson International, Inc.
Forestview Road, P.O. Box 40
Orillia, Ontario
Canada L3V 6H9
Telephone: (705) 325-2274
Fax: (705) 325-1485

Toll Free: (800) 563-6479

Spieth Anderson U.S.A. Inc.
4608-A Fairlane Avenue
Fort Worth, Texas
USA 76119
Telephone: (817) 536-3366
Fax: (817) 536-3006

Toll Free: (800) 331-8068

355-940 JFK Ring Accessory Package / Instruction #8920104
December 19, 2006

www.spiethanderson.com

Spieth Anderson International Inc.
135 Forestview Road, P.O. Box 40 Orillia, ON Canada L3V 6H9

Phone: 1 (705) 325-2274 Fax: 1 (705) 325-1485
E-mail: info@spiethanderson.com

The SA Sport - JFK Rings Accessory Package can be utilized simply by rotating your JFK Ring Frame Adjusting Tubes to make this functional accessory:

- **JFK Rings Accessory Package (#355-940)**
 - Includes climbing Rope, Rope Seat, and T-Bar Trapeze and trapeze suspension brace 1 set
 - Requires 363 Ring Frame (Not Included) 1 set



Shown with Safety Padding but not included in 355-940:

- JFK Upright Padding (#355-UP)
- JFK Base Padding (#355-BP)
- JFK Circuit Mat (#355-230X)
- Panel Mats



Warning


Any activity involving motion or height creates the possibility of serious injury including permanent paralysis and even death, from landing or falling on the neck, head, or other parts of the body.

You assume a risk of serious injury in using this equipment. However, this risk can be reduced by strictly following these rules at all times.

1. This equipment is designed and intended for use only by the beginner level gymnasts under a weight of 150 lbs (68 kg).
2. Use this equipment **only** under the supervision of a trained and qualified instructor.
3. This equipment **must be used only when protected by proper matting as recommended by the Federation of International Gymnasts (F.I.G.). If in doubt concerning proper matting, do not use this equipment.**
4. This equipment **must be used with proper spotting equipment and qualified spotters suitable to the activity or skill.** Always consult an instructor.
5. **Know your own limitations and the limitations of this equipment.** Follow progressive learning techniques and always consult an instructor.
6. **Always** inspect this equipment for proper stability before each use.
7. **Always** inspect this equipment for loose fittings and parts. Replace any worn, defective or missing parts.
8. **Always inspect this equipment for improper or unsafe installation. If in doubt, do not use this equipment.**

ROPE SUSPENSION SYSTEM CURRENT STYLE


ITEM	DESCRIPTION	QTY	DWG No	PART No
1	BASE ASSEMBLY	2	C-355-1A	355-01
2	JFK UPRIGHT	1	C-355-5A	355-5
3	RING FRAME WELDMENT	2	C-355-306A	355-306
4	CROSS RAIL WELDMENT	1	C-355-951A	355-951
5	CLAMP ADJ. TUBE WELDMENT	2	A-355-960A	355-960
6	Ø1/2" -13NC HEX HEAD CAPSCREW	2		8304130
7	1/2" -13NC NYLOCK NUT	2		8305150
8	Ø3/8" X 2 1/2" LG LOCK PIN	2		8316504
9	1/2" PLATE WASHER	4		8320011

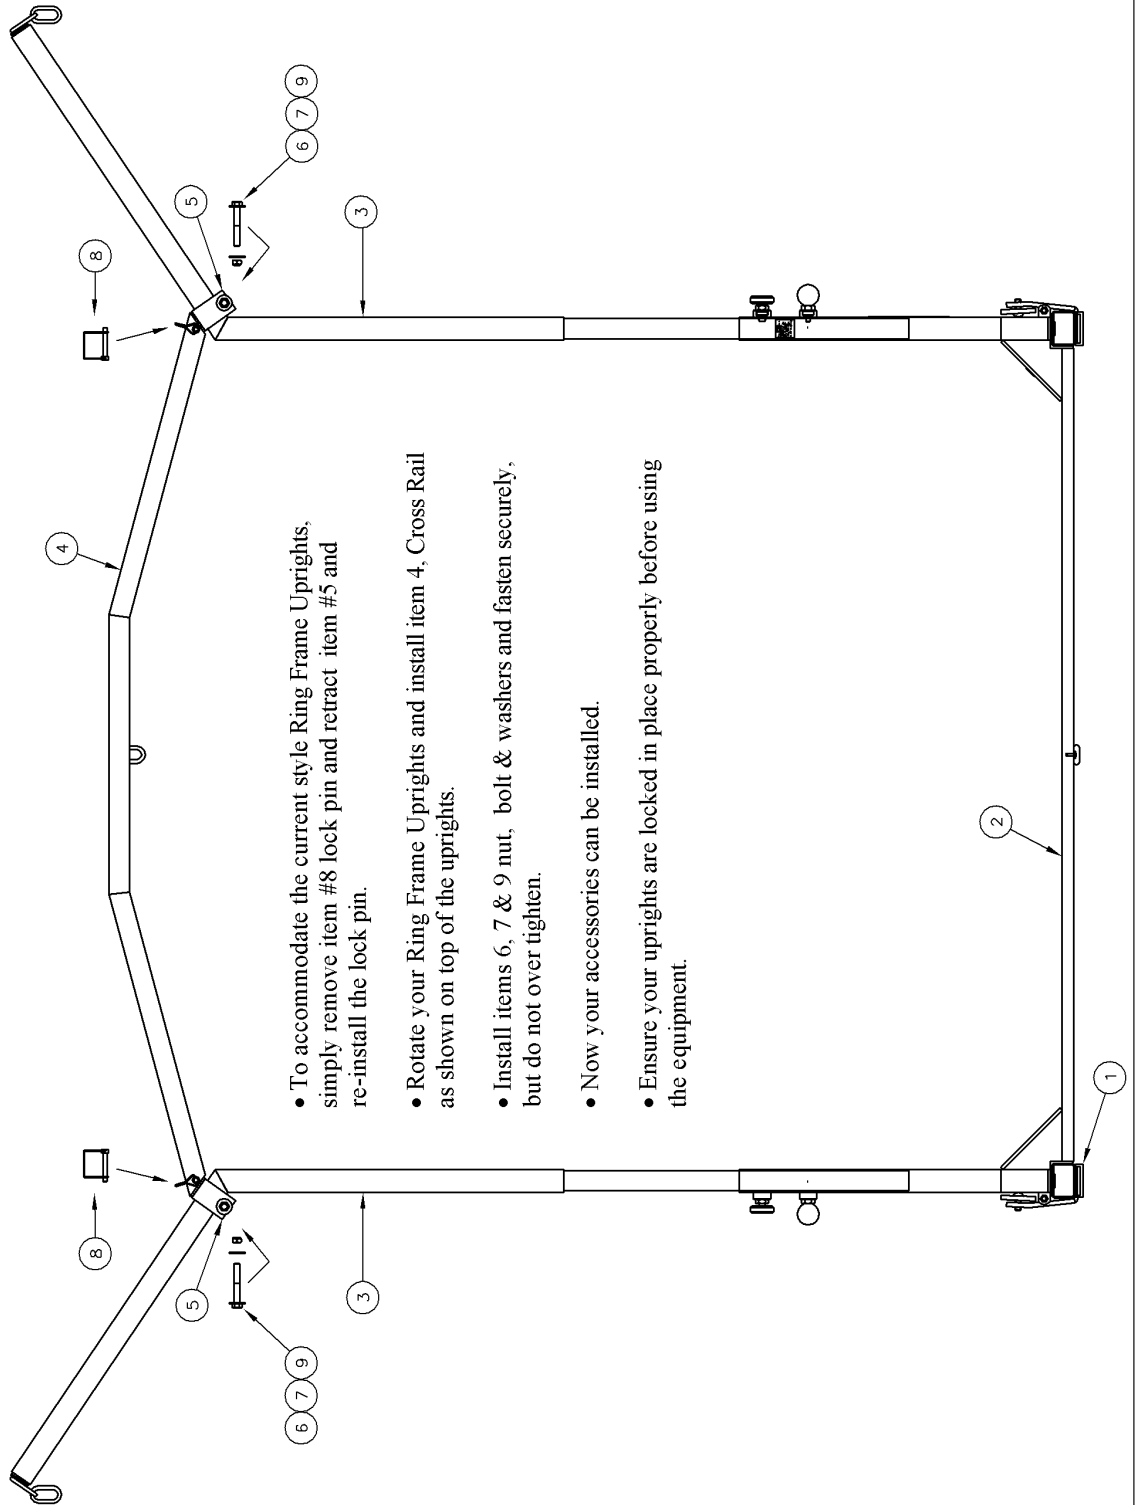

- To accommodate the current style Ring Frame Uprights, simply remove item #8 lock pin and retract item #5 and re-install the lock pin.
- Rotate your Ring Frame Uprights and install item 4, Cross Rail as shown on top of the uprights.
- Install items 6, 7 & 9 nut, bolt & washers and fasten securely, but do not over tighten.
- Now your accessories can be installed.
- Ensure your uprights are locked in place properly before using the equipment.

ROPE SUSPENSION SYSTEM – OLD STYLE

ITEM	DESCRIPTION	QTY	DWG No	PART No
1	BASE ASSEMBLY	2	C-355-1A	355-01
2	JFK UPRIGHT	1	C-355-5A	355-5
3	RING FRAME WELDMENT	2	C-355-306A	355-306
4	CROSS RAIL WELDMENT	1	C-355-951A	355-951
5	CLAMP ADJ. TUBE WELDMENT	2	A-355-960A	355-960
6	Ø1/2"-13NC HEX HEAD CAPSCREW	2		8304130
7	1/2"-13NC NYLOCK NUT	2		8305150
8	Ø3/8" X 2 1/2" LG LOCK PIN	2		8316504
9	1/2" PLATE WASHER	4		8320011

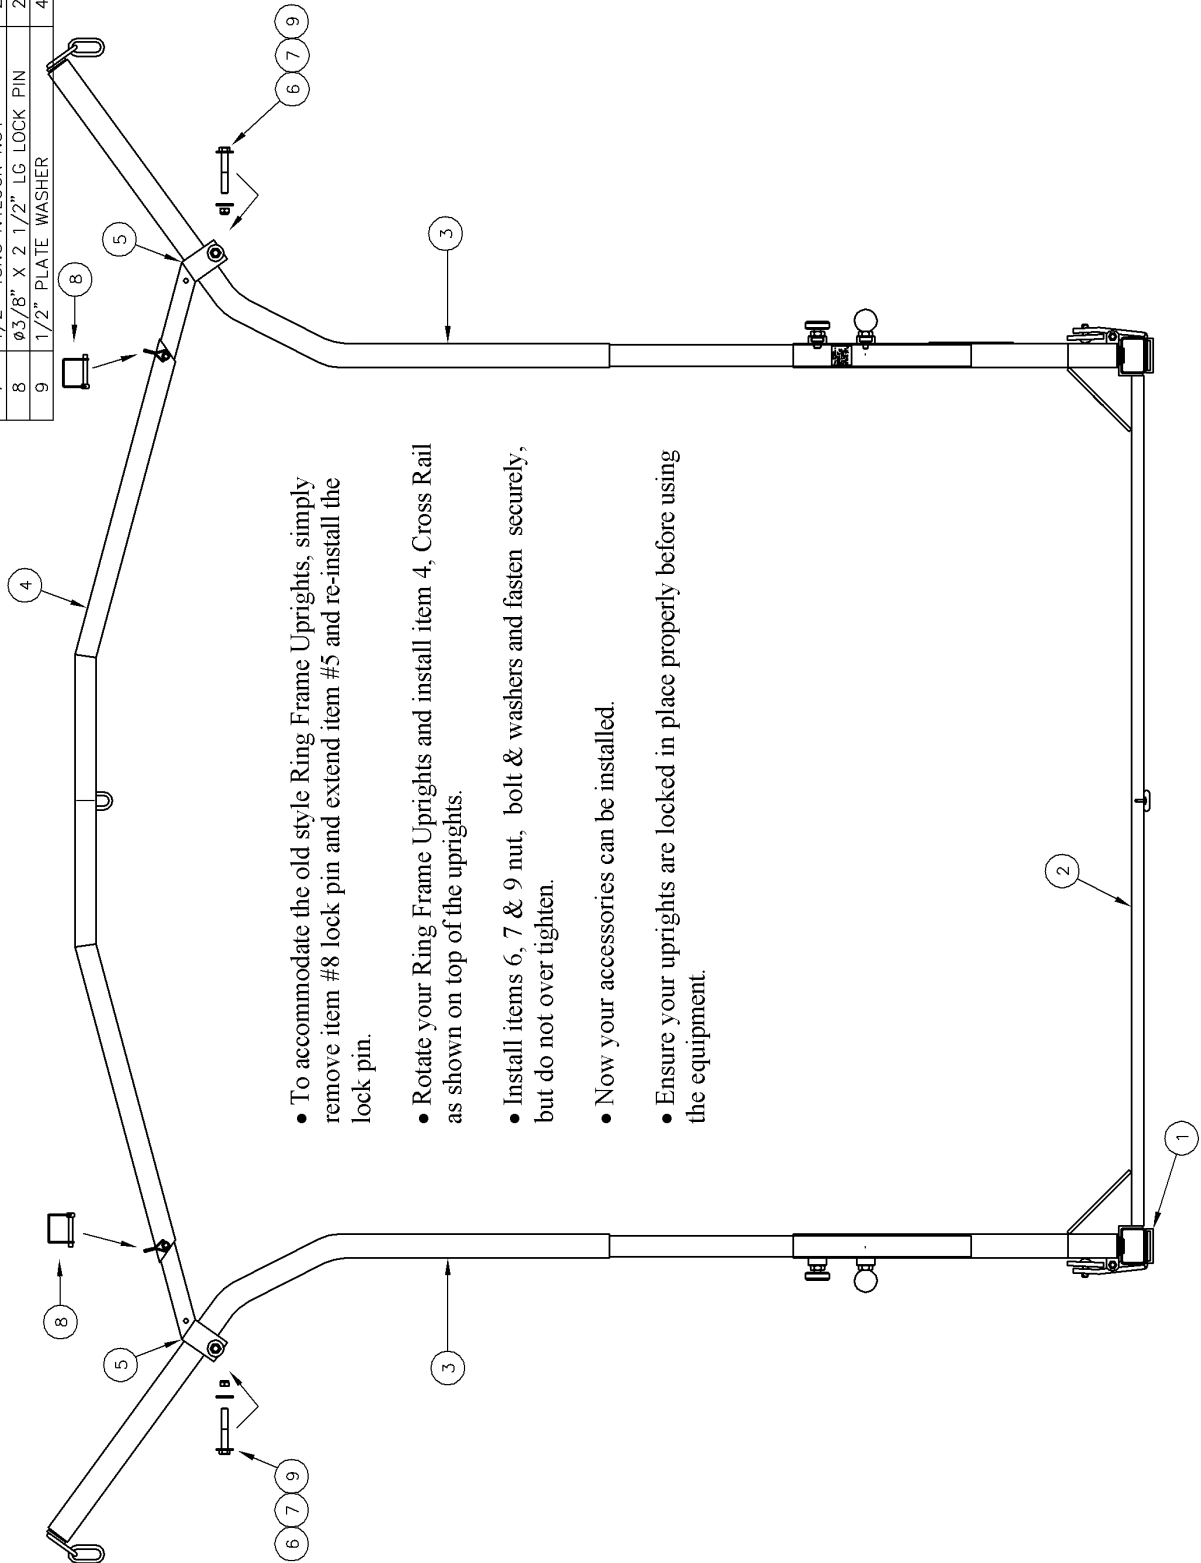

- To accommodate the old style Ring Frame Uprights, simply remove item #8 lock pin and extend item #5 and re-install the lock pin.
- Rotate your Ring Frame Uprights and install item 4, Cross Rail as shown on top of the uprights.
- Install items 6, 7 & 9 nut, bolt & washers and fasten securely, but do not over tighten.
- Now your accessories can be installed.
- Ensure your uprights are locked in place properly before using the equipment.